

Installation and Operating Instructions Premier Technologies Smart Media SM1000 Series Player



Important

Before using the Premier Information On Hold unit, please read these operating instructions carefully.

Introduction

The SM 1000 is a 100% digital download Smart Media player used for Information On Hold. Up to six messages can be stored on the Smart Media flash card for future playback. Messages are downloaded to the Smart Media card via the Proprietary Audio MuVer software from Premier Technologies. Fresh On-Hold messages can be downloaded free of charge via the internet with MuVer software and a Smart Media read/writer, or by simply inserting a new Smart Media card.

Dealer Service

A network of authorized Premier Technologies, dealers can provide service backed by Premier's technical staff. For the name of your local dealer or for technical assistance from Premier Technologies, contact:



Premier Technologies, Inc.


One Premier Drive • P.O. Box 159
Long Lake, MN 55356 • (952) 475-2317
(800) 466-8642 • FAX (952) 475-3579

Specifications

Sampling Rate:	64 kbps (effective 112 kbps).
Recording Times:	4, 16, 32 or 128 minutes (memory dependent).
Frequency Response:	200 Hz to 3400 Hz (Full spectrum of telephone transmission).
Flash Memory:	Nonvolatile, unaffected by power interruptions, no matter how long the unit is without power.
Power Source:	12V DC adaptor, included.
Cables (included):	RCA to RCA and RCA to Mini.
Audio Outputs:	600 Ohm or 8 Ohm (Note: 8 Ohm output has a 5 watt amplifier).
Tone Control:	600 Ohm and 8 Ohm outputs.
Working Temp:	From +5C to +50C (40F to 122F).
Dimensions:	4.85"H * 6.5"W * 1.4"D.
Weight:	4lbs. (Boxed).

Operating Controls and Indicators

1. Power - LED - indicates power to the unit and blinks the message number being played .
2. AC Adaptor Jack - Insert round plug of 12V DC adaptor into power unit.
3. Play Mode Selection - The SM1000 can play one message continuously or play all messages in sequence from the inserted Smart Media card. To change the message number to be played, press and hold the "Play Mode" button for the number of blinks equal to the desired message number. The SM1000's power LED will continuously blink the message number being played after the button is released. To play in sequence all stored messages from the Smart Media card, press and hold the "Play Mode" button for 7 blinks. The message play number is stored in the Smart Media card, so loss of power will not change the message being played.
4. Phone Outputs - Insert the cable provided into the output jack your phone system requires, either 600 Ohm or 8 Ohm.
5. Output Tone - Controls the tone on the 600 Ohm and 8 Ohm outputs.
6. Output Volume - Controls the output volume of the unit.

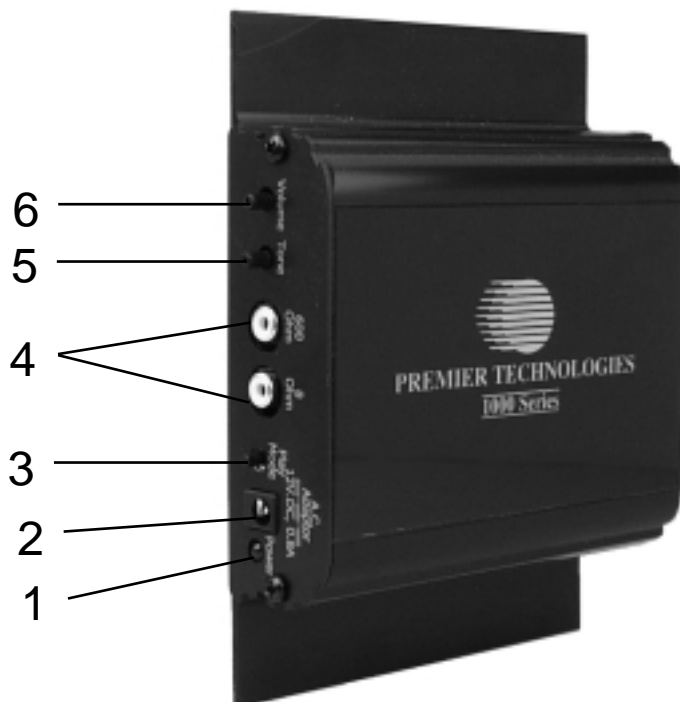

Installation

1. Plug the small-connector end of the AC adaptor into the 12 V DC input jack at the side of the unit. Plug the larger power supply end of the adaptor into a grounded AC power outlet. *The AC power outlet must be one that remains ON at all times.*
2. Connect a cable (provided) from the music on hold part of the telephone system to the 600 Ohm or 8 Ohm output jack of the unit.
3. Insert Smart Media card with gold side down.
4. Adjust volume and tone controls to the phone system as needed.
5. Select message to be played using the "Play Mode" button.

FCC Information

NOTE: This equipment has been tested and found to comply with the limits for Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against interference when the equipment is operated in a commercial environment.

The user is cautioned that changes or modifications not expressly approved by Premier Technologies, Inc. could void the user's authority to operate the equipment.

Warranty

Upon receipt, Premier Technologies, Inc. will repair or replace, as its option, for a period of three years from the date of purchase, any SM1000 that proves defective in materials or workmanship. **This does not include the smart media cards.** Premier Technologies, Inc. is not liable for indirect, incidental, or consequential damages in connection with the use of this product. **This limited warranty does not include labor for installation or removal of a defective unit.**